



## 24 WATT T5 HO DIRECT REPLACEMENT LED GROW LIGHT 4FT

The Active Grow T5 HO LED grow light is a plug and play LED tube featuring increased PPF output and lower power consumption. The T5 HO LED light is suitable for use with a wide range of ballasts so installation is easy as no wiring is required. The T5 HO LED light is suitable for use in commercial growing applications; including vegging, propagation, cloning and germination.



### 60% Energy Saving

The T5 HO LED grow light uses up to 60% less energy than T5 HO fluorescent lights and operates directly with the existing fixture's ballast.

### 2.2 Efficient PPF Output



Features exceptional photon electrical efficiency up to 2.2  $\mu\text{moles per joule}$  at 18" above the canopy.

### Sun White or Red Bloom Spectrum

Choose between high CRI sun white spectrum that mimics spring-time vegetative friendly light conditions and red bloom spectrum for more flowering friendly light conditions.

### 50,000 H Extra Long Lifetime

The LED T5 grow tube features an exceptional 50,000 hour lifetime.

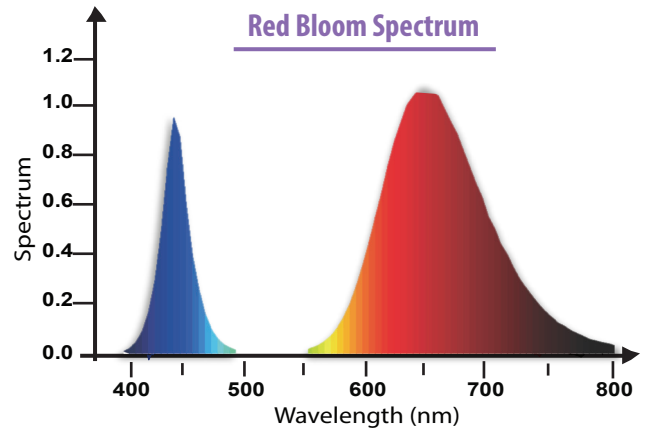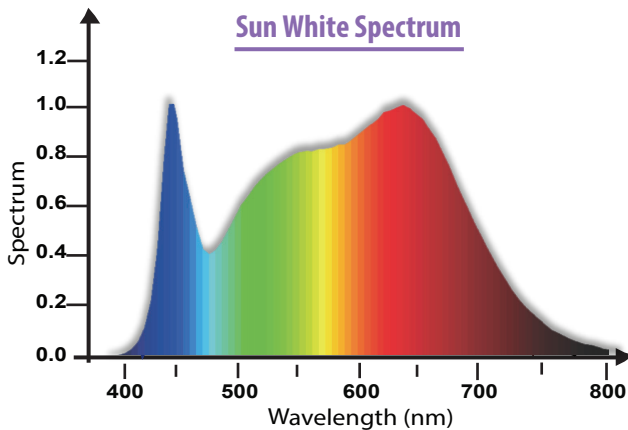

| SPECIFICATIONS*                                      | T5 HO DIRECT REPLACEMENT LED GROW LIGHT | T5 HO DIRECT REPLACEMENT LED GROW LIGHT |
|--|---|---|
| Model number   | 24T5HOGROW-4F-WS                        | 24T5HOGROW-4F-RS                        |
| Power  | 24 watts                                | 24 watts                                |
| Power input  | 120-277V 50-60Hz                        | 120-277V 50-60Hz                        |
| PPF output ( $\mu\text{moles/s}$ )**                 | 60 $\mu\text{mol/s}$                    | 55 $\mu\text{mol/s}$                    |
| Photon electrical efficacy ( $\mu\text{moles/J}$ )** | 2.2 $\mu\text{moles/J}$                 | 2.0 $\mu\text{moles/J}$                 |
| Rated power factor                                   | >95%                                    | >95%                                    |
| Spectrum   | Sun white                               | Red bloom                               |
| Dimensions (l x w x h)                               | 47" x 0.67" x 0.67" (1194 x 17 x 17mm)  | 47" x 0.67" x 0.67" (1194 x 17 x 17mm)  |
| Weight   | 0.34lb. / 154g                          | 0.34lb. / 154g                          |
| Dimmable   | No                                      | No                                      |
| Lifetime   | 50,000 hours                            | 50,000 hours                            |
| Warranty   | 3 years                                 | 3 years                                 |

\*Specification data is preliminary and subject to change.

\*\*Electrical efficacy includes 4 watts for ballast power. True power and PPF output will vary based on ballast and fixture type.